



**POP-UP TRANSFER, POP-UP STOPS,
PALLET CENTERING, PALLET LIFT
and PALLET CROWDER OPTIONS**



Designed to handle heavy duty loads such as **pallets, skids and drums**. Heavy duty construction with #50 toll-to-roll drive chain. (#60 chain optional.) Standard rollers are 2 1/2" diameter x #11 gauge or 2 5/8" diameter x #7 gauge. Standard roller centers are 5". Supports are 4" structural with adjustable feet.


MODEL 525 CHAIN DRIVEN LIVE ROLLER CONVEYOR SPECIFICATIONS		
	Standard	Options
Effective Widths	13" to 40"	Specify up to 72" E.W.
Lengths	5' min.	3' min., max. based on application
Roller Size	2" Dia. x 11 ga. with 7/16" hex shaft - 580 lb. roller cap.	
Roller Center	5"	2-13/16", 3-7/16", 4-3/8", 5-15/16", 10"
Frame	Formed 7 ga.	6" C structural
Drive	3/4 H.P. 230/460/3/60	1, 1-1/2, 2, 3 H.P. 230/460/3/60, severe duty, inverter duty, brake motor
Chain Drive	#50 roll to roll drive	#60 available

OPTIONAL

Roller Space - Consult factory, Roller Center - Consult Factory, Drive locations: as needed, Galvanized or stainless construction, H. P. , Speeds, Variable speed, Controls, Coated rollers, Paint, multi-strand chain transfers, Pallet lifts, Pallet jack plates for side or end load, "C" Face brake and Fixed end stop, Rollers set low, UHMW sleeves, Accumulation sleeves, Knee braces, Air operated blade stop, Supports - 6" @ #8.2 structural channel,



NOTE: Specifications subject to change without notice

POP-UP TRANSFER, POP-UP STOPS, PALLET CENTERING, PALLET LIFT and PALLET CROWDER OPTIONS

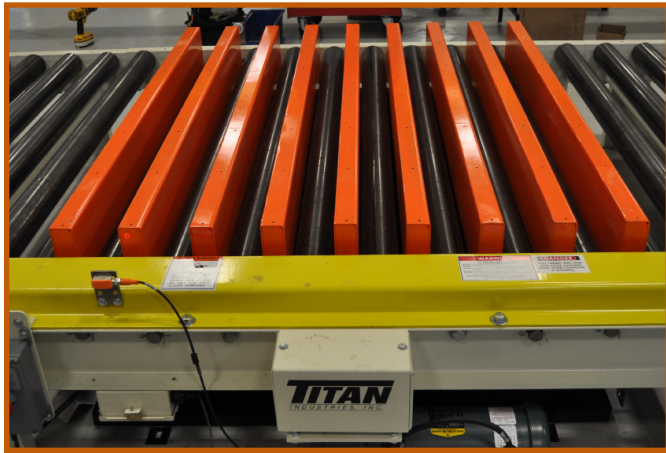


Chain Driven Live Roller Conveyor
with Pop-Up Pallet Lift

Chain Driven Live Roller Conveyor with
Pallet Centering device - Pallet Crowder also available

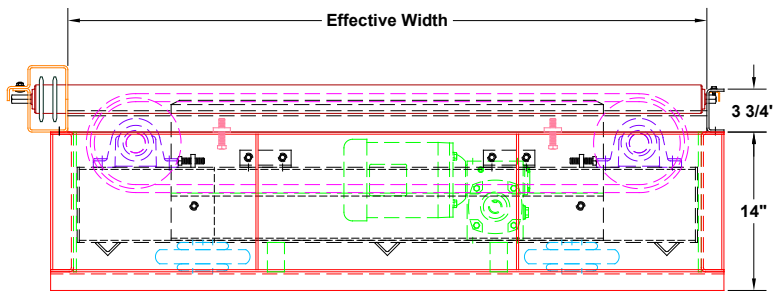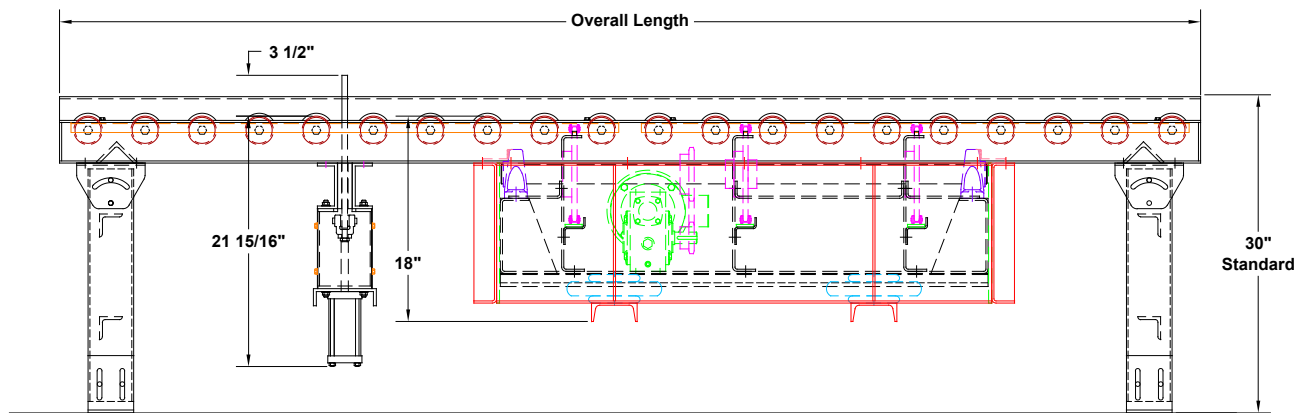


End View


NOTE: Pop-up Travel Chain Approximately $\frac{3}{4}$ " above roller

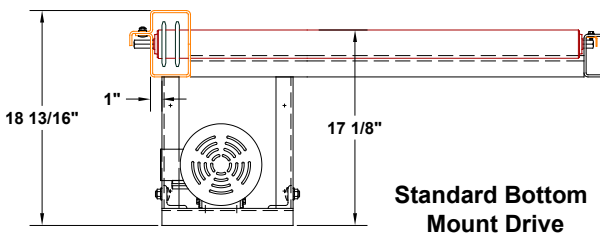

Standard Bottom
Mount Drive

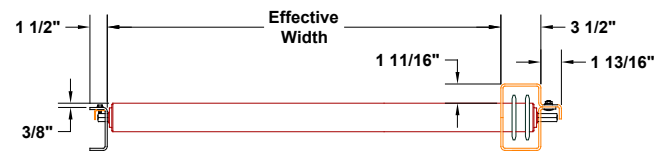

Rollers Set High

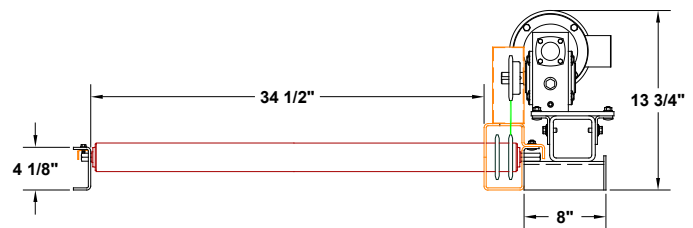

Standard Side Mount Drive

